
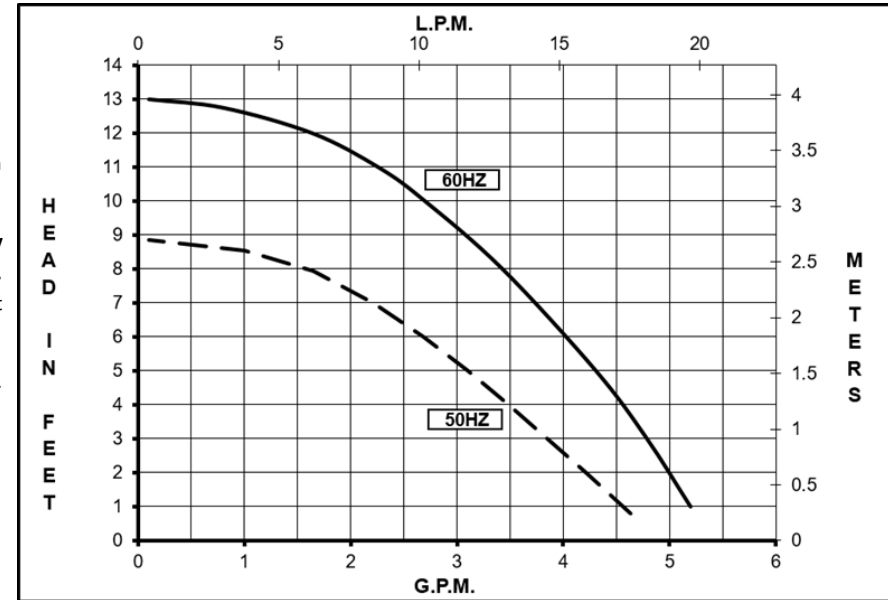




DESCRIPTION: Series 2 are centrifugal magnetic drive pumps, eliminating the need for a shaft seal. Pumps can be serviced with a screwdriver. See the parts list for a breakdown of parts. BC models have an encapsulated impeller magnet.


OPERATION: Pumps are not self-priming, lack a suction lift, and thus require a **flooded suction**. Pumps **cannot be run dry** because the impeller requires the liquid being pumped for lubrication. For liquids with a specific gravity greater than water, have a higher viscosity, or for elevated temperatures, a trimmed impeller may be necessary. For application assistance, contact March Pump.

ELECTRICAL: The AC-2CP-MD, BC-2CP-MD & BC-2AP-MD area available in 1 Phase 115V 50/60Hz or 1 Phase 230V 50/60Hz. Both have a 3 foot (0.9 meter) cord, are U.L. listed, and are rated for continuous duty.

Specifications		AC-2CP-MD	BC-2CP-MD	BC-2AP-MD
Product	115V	0125-0152-0100	0125-0154-0100	0125-0155-0100
	230V	0125-0152-0200	0125-0154-0200	0125-0155-0200
Inlet-Outlet		3/8" FPT & 3/4" MPT-1/4" MPT	3/8" FPT & 3/4" MPT-1/4" MPT	3/4" OD-1/2" OD
Max Internal Pressure		50PSI (344 kPa)	50PSI (344kPa)	50PSI (344 kPa)
Max Liquid Temperature		190F/87C	190F/87C	190F/87C

	60Hz										50Hz									
	Max Flow		Max Head			Electrical					Max Flow		Max Head			Electrical				
Model	GPM	LPM	FT	PSI	M	Ph	V	A	HP	kW	GPM	LPM	Feet	PSI	M	Ph	V	A	HP	kW
All	5	18.9	13	5.7	4	1	115 or 230	1.36 or 0.63	1/30	0.02	4.89	18.5	8.8	3.8	2.7	1	115 or 230	1.1 or 0.56	1/30	0.02

All specifications & data are based on pumping water & are intended as a guideline only. Specifications may vary with different motors.

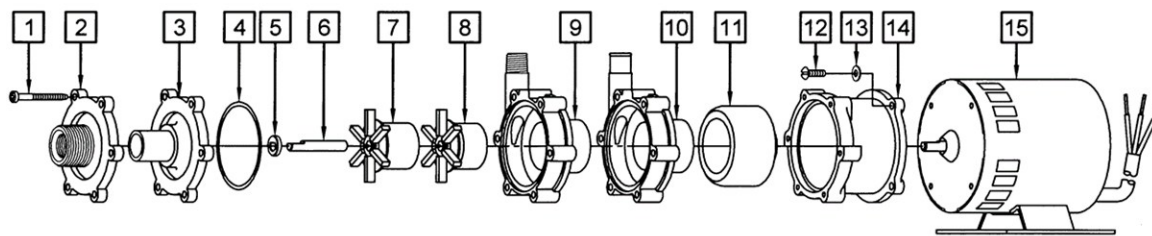

NOTE: When attaching the Drive Magnet to the motor shaft, position the face of the Drive Magnet 1/16 inch below the face of the Motor Bracket.

AC-2CP-MD				BC-2CP-MD			
Item	Part Number	QTY REQ	Description	Item	Part Number	QTY REQ	Description
1	0115-0062-1000	6	#7-19 x 1-7/16" Long Self-Tapping Screw (Stainless)	1	0115-0062-1000	6	#7-19 x 1-7/16" Long Self-Tapping Screw (Stainless)
2	0125-0056-1000	1	Cover with 3/8" FPT x 3/4" MPT Inlet (Polypropylene)	2	0125-0056-1000	1	Cover with 3/8" FPT x 3/4" MPT Inlet (Polypropylene)
4	0125-0065-1000	1	3/32" CS x 2-3/16" OD "O" Ring (Viton)	4	0125-0065-1000	1	3/32" CS x 2-3/16" OD "O" Ring (Viton)
5	0130-0028-1000	1	Thrust Washer (Ceramic)	5	0130-0028-1000	1	Thrust Washer (Ceramic)
6	0125-0061-1000	1	Shaft (Ceramic)	6	0125-0061-1000	1	Shaft (Ceramic)
8	0125-0055-0100	1	Impeller with Bare Ceramic Magnet (Polypropylene)	7	0125-0087-0200	1	Encapsulated Impeller (Polypropylene)
9	0125-0058-1000	1	Rear Housing with 1/4" MPT Outlet (Polypropylene)	9	0125-0058-1000	1	Rear Housing with 1/4" MPT Outlet (Polypropylene)
11	0125-0083-0100	1	0.250" Bore Drive Magnet	11	0125-0083-0100	1	0.250" Bore Drive Magnet
12	0150-0015-1000	4	#8-32 x 1/2" Long Screw (Stainless)	12	0150-0015-1000	4	#8-32 x 1/2" Long Screw (Stainless)
13	0858-0004-1000	4	#8 Washer (Stainless)	13	0858-0004-1000	4	#8 Washer (Stainless)
14	0125-0069-1000	1	Motor Bracket (Plastic)	14	0125-0069-1000	1	Motor Bracket (Plastic)
15	0125-0145-1000	1	Motor 115V, 50/60Hz	15	0125-0145-1000	1	Motor 115V, 50/60Hz
15	0125-0146-1000	1	Motor 230V, 50/60Hz	15	0125-0146-1000	1	Motor 230V, 50/60Hz
W	0125-0108-0200	1	Wet End Kit (1,2,4,5,6,8,9)	W	0125-0109-0200	1	Wet End Kit (1,2,4,5,6,7,9)
				BC-2AP-MD			
NOTE: Contact Factory for other materials and/or parts not listed. Special voltage motors are available upon special order. Materials in contact with the liquid: AC Models: Polypropylene, Viton, Ceramic, Ceramic Magnet. BC Models: Polypropylene, Viton, Ceramic WARRANTY: https://www.marchpump.com/about/warranty/				1	0115-0062-1000	6	#7-19 x 1-7/16" Long Self-Tapping Screw (Stainless)
				3	0125-0096-1000	1	Cover with 3/4" OD Smooth Inlet (Polypropylene)
				4	0125-0065-1000	1	3/32" CS x 2-3/16" OD "O" Ring (Viton)
				5	0130-0028-1000	1	Thrust Washer (Ceramic)
				6	0125-0061-1000	1	Shaft (Ceramic)
				7	0125-0087-0200	1	Encapsulated Impeller (Polypropylene)
				10	1008-0001-1000	1	Rear Housing with 1/2" OD Smooth Outlet (Polypropylene)
				11	0125-0083-0100	1	0.250" Bore Drive Magnet
				12	0150-0015-1000	4	#8-32 x 1/2" Long Screw (Stainless)
				13	0858-0004-1000	4	#8 Washer (Stainless)
				14	0125-0069-1000	1	Motor Bracket (Plastic)
				15	0125-0145-1000	1	Motor 115V, 50/60Hz
				15	0125-0146-1000	1	Motor 230V, 50/60Hz

For the General Installation Manual, see this link <https://www.marchpump.com/wp-content/uploads/2019/07/march-pump-general-installation-guide-0750-040.pdf>

Or Scan QR Code



0125-0158-1000